







Wireless Connect



The smart way to control power to ancillary electrical products



Tech Hub

- Easier connection
- Reduced installation times
- Single point switch operation

12V Power

Single point connection for efficient installation


Battery Protection

Maintains battery voltage

Unique Signal Pairing

Allows x2 switch panels to be used

Switch Remote

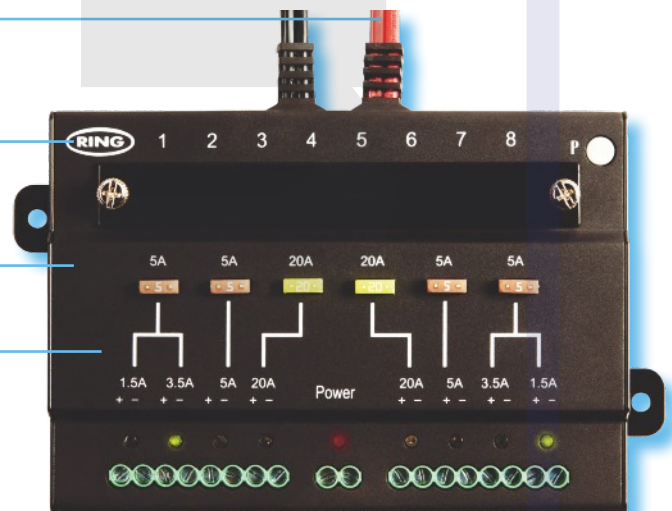

8 Fused Output Channels

Easy connection for ancillary electrical products

Single Point Switch Panel

8 switches controlled via one user interface

Docking Station

Single point for mounting and charging

Specifications	UK/Euro
Product Code	RSU60
Input Voltage	11-15V
Input Current	Max 60A
Battery Protect Voltage Cut Off	11V

Specifications	UK/Euro
Input Reverse Voltage Protection	to 16V
Fused Input	60A
8 Fused Relay Channels	2x 1.5A, 2x 3.5A, 2x 5A & 2x 20A

Ring Automotive Limited . Geldard Road, Leeds LS12 6NA United Kingdom
 Telephone +44 (0) 113 213 2000 . Fax +44 (0) 113 231 0266
 Email autosales@ringautomotive.com . www.ringautomotive.com

Wireless Connect



The smart way to control power to ancillary electrical products

		60A		12V	
Wireless	8 Outputs	Ampage	Battery Protect	Voltage	8 Way Switch

Technical Profile

Mounting Options

360 Single Point Mount



Fixed Panel Mount

Switch Remote

Lithium Battery
Quick, efficient recharging

Backlit Illumination
For working in low light

Active Channel Lights
Indicates switch status icon

Adaptable Switch Icons
Remote can be personalised to suit individual requirements

Single Point Switch Panel
8 switches controlled via one user interface

Power Status Indicator


Docking Station
Secure fitment when travelling and recharging

12V Power
Single point connection for efficient installation

Tech Hub

Manual Override
Manual switch in case of an emergency

8 Fused Output Channels
Easy connection for ancillary electrical products

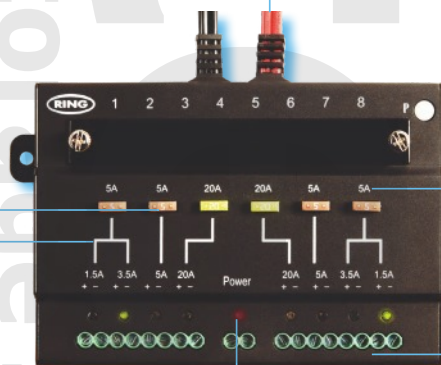


Battery Protection
Maintains battery voltage

60Amp Capacity
Powerful enough to operate multiple ancillaries at the same time

Unique Signal Pairing
Allows x2 switch panels to be used

Icon Stickers



Adaptable Switch Icons
To suit individual requirements

Spare Component Parts

Product Code	UK/Euro
RSURC	Single Point Switching Panel
RSUCB	Docking Station

Product Code	UK/Euro
RSUCPU	Tech Hub
RSUDM	360 Single Point Mount

Ring Automotive Limited . Geldard Road, Leeds LS12 6NA United Kingdom
Telephone +44 (0) 113 213 2000 . Fax +44 (0) 113 231 0266
Email autosales@ringautomotive.com . www.ringautomotive.com